



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

Bottom Mount Reach-In Freezers

Standard Features

- Bottom mount compressor units with environmentally friendly R290 refrigerant
- Stainless steel exterior & interior
- Electronic temperature controller
- Maintains temperatures between -8°F – 0°F
- LED interior light(s)
- Recessed door handle(s)
- Door lock(s) standard
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- Three (3) pre-installed shelves per section
- Down duct refrigeration to ensure even distribution of air

Optional Accessories

- Extra shelves – includes 4 shelf clips per shelf
MBF8520GR shelf part #: W0402316
MBF8531GR shelf part #: W0402315
MBF8501GR/GRL shelf part #: W0402393
MBF8503GR shelf part #: W0402387
MBF8504GR shelf part #: W0402387 left/right shelf,
part #: W0402388 middle shelf

For the best results of food preservation we recommend setting your freezer between -8°F to 0°F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.

MODELS:

MBF8520GR / MBF8531GR / MBF8501GR /
MBF8501GRL / MBF8502GR / MBF8503GR / MBF8504GR



MBF8520GR



MBF8531GR



MBF8501GR



MBF8501GRL



MBF8502GR



MBF8503GR



MBF8504GR



3 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY





"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com


California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Rated Current (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
MBF8520GR	1	8.3	3	2	6.3	115/60/1	1/2	R290	24 ^{1/4} × 24 × 63 ^{1/4}	187	220
MBF8531GR	1	12.57	3	4	6.3	115/60/1	1/2	R290	25 ^{5/8} × 26 × 76 ^{3/8}	232	276
MBF8501GR	1	19.1	3	4	6.3	115/60/1	1/2	R290	27 × 31 ^{7/10} × 83 ^{1/10}	265	298
MBF8501GRL	1	19.1	3	4	6.3	115/60/1	1/2	R290	27 × 31 ^{7/10} × 83 ^{1/10}	265	298
MBF8502GR	2	28.5	6	4	8.6	115/60/1	3/4	R290	39 ^{1/2} × 31 ^{7/10} × 83 ^{1/10}	330	379
MBF8503GR	2	43.8	6	4	8.6	115/60/1	3/4	R290	54 ^{2/5} × 31 ^{7/10} × 83 ^{1/10}	410	465
MBF8504GR	3	68	9	4	6.2	208-230/115/60/1	1	R290	81 ^{9/10} × 31 ^{7/10} × 83 ^{1/10}	551	628


PLAN VIEW

MBF8520GR

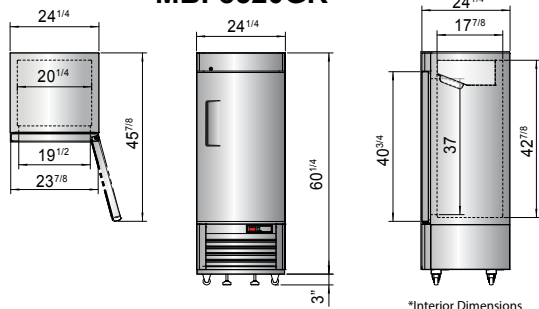


*Interior Dimensions

MBF8531GR

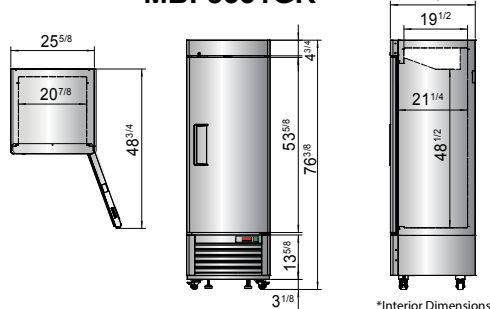

*Interior Dimensions


MBF8501GR MBF8501GRL MBF8502GR

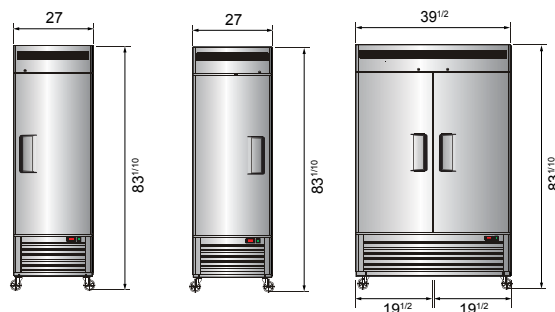


MBF8503GR



MBF8504GR

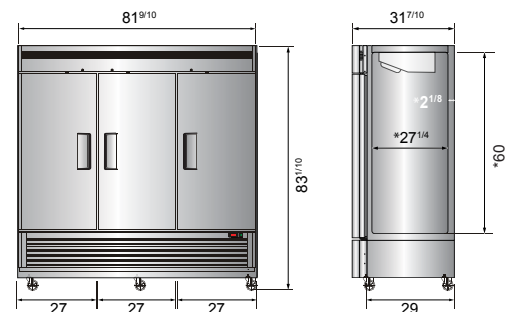

*Interior Dimensions

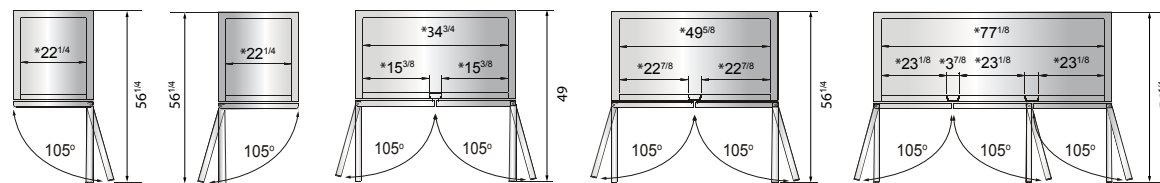

SELF-CLOSING AND STAY OPEN DOOR FEATURE

Casters

Epoxy shelves

Door lock

Down duct


Temperature control

MBF8504GR



MBF8520GR
MBF8531GR
MBF8501GR(L)
MBF8502GR
MBF8503GR

NEMA-L14-20R



NEMA
20A-125/250V

NEMA 5-15P



NEMA
15A/125V