F92EKDPS
DISHWASHER



WARRANTY
1 year
parts & labor

ENERGY STAR

LAMBER dishwashers are less expensive at purchase and less expensive to use

lamber
Made in Italy

Features and Benefits

Stainless steel construction AISI 304 18/10: 208 – 240 volts, single phase.

Double skin with acoustic & thermal insulation Less water consumption and energy efficient.

Wash tank slanted with rounded edges Seamless interior prevents leakage.

Rotating stainless steel upper & lower wash rinse arms Longer lasting and easier to clean.

Digital read out For easy read, with 2, 3, 4 and 15 minute cycle.

Automatic loading tank Tank fills up as soon as the machine is turned on.

Integral tank filter kit Prevents food particles getting into the machine.

Rinse aid dispenser and detergent pump Dispenses detergent and rinse aid efficiently.

Door opening safety device Machine shuts off automatically.

Thermo control Guarantees selected temperature for every rinse cycle and when machine is not in use. **Security thermostat** Automatic booster shut off.

Extractable control panel For easy maintenance.

Soft Start Prevents over pressure water spillage and easy on glassware and china.

Undercounter dishwasher F92EKDPS - (Soft Start) with booster, rinse, drain & soap pumps.

Included accessories (2) baskets, (1) general basket, (2) cutlery containers.

Please consult our web site www.eurodib.com for additional information on other product lines.
US 156 Lawrence Paquette, Champlain, NY 12919 | **CAN** 120 rue de la Barre, Boucherville, Qc J4B 2X7
Tel.: **1 888 956 6866** | Fax: **1 877 956 6867** | **www.eurodib.com**



lamber

- Undercounter dishwasher;
- Stainless steel construction 18/10 AISI 304;
- Wash cycle time: 2-3-4 minutes;
- Endless cycle: max 15 minutes;
- Soft touch electronic control panel;
- Temperature's electronic display;
- Double skin with thermic and acoustic insulation;
- Cycle start with soft-start system;
- Stainless steel lower and upper rotating wash arms;
- Stainless steel lower and upper rotating rinse arms;
- Self-washing slanted tank with rounded edges;
- Integral tank filters;
- Pressed self-cleaning door;
- Extractable control panel for an easy maintenance;
- Rinse aid dispenser;
- Detergent pump,
- Automatic tank loading;
- Door opening safety device;
- Thermocontrol: device which guarantees the selected temperature for every rinsing cycle even in case of non stop work;
- Security thermostat;
- Certifications: UL, UL Sanitation;


ENERGY STAR


SIZE:
23 5/8" W x 25 1/2" D x 32 1/4" H
Cycle period: 2-3-4 minutes
Capacity per hour:
Baskets/H: 30/20/15
Dishes/H: 540/360/270
Dishes per basket 12÷18


F92EKDPS

Accessories:
2 baskets for dishes;
1 generic basket;
2 cutlery containers;

OPTIONS
- Tank drain unit with filter,
- Stainless steel base H17,72 inch



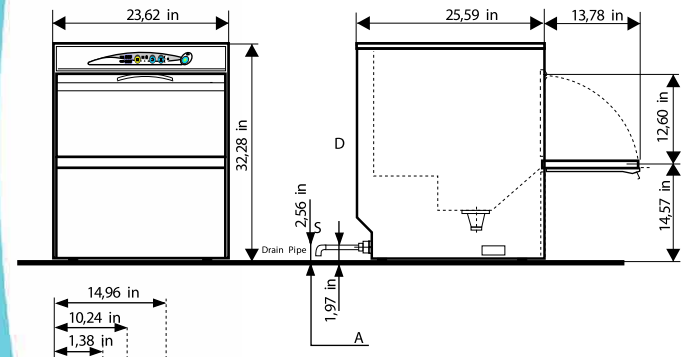



A	Maximum height of drain from floor	
E	Water inlet	3/4"
L	Electric input	208/1~60Hz
S	Drain	32 mm - 1" 1/4
D	Drain System: Separate drain pump lifted up to 24 inches above floor level	

Specifications	F92EKDPS	
VOLTAGE	208 V1ph 60Hz	V
WASHING PUMP	650	W
WASH TANK ELEMENTS	2000	W
RINSE TANK ELEMENTS	6000	W
TOTAL RATING	6650	W
MAX CURRENT INTENSITY	34	A
PLATES CLEARANCE	12,60	inch
WORK HEIGHT	14,57	inch
TANK CAPACITY	4,8	Gal.
BOILER CAPACITY	1,6	Gal.
PUMP DELIVERY	69	Gal/min
WATER CONNECTION	131	°F
WATER CONSUMPTION PER CYCLE	2,40	Lt.
WATER CONSUMPTION PER HOUR	52	Lt.
WATER PRESSURE	20 ± 5	psi
WATER HARDNESS	5 ÷ 10	TH(°F)
RINSING WATER TEMPERATURE	179 ÷ 194	°F
WATER INLET	3/4"	inch
WATER OUTLET	1" 1/4 (3/4 - EKDPS)	inch
NET WEIGHT	152	Lbs
GROSS WEIGHT	165	Lbs
PACKING SIZE	24,80W x 28,37D x 44,09H	inch
NOISE LEVEL	<60	dB(A)

The manufacturer reserves the right to make modifications of materials and models without warning.

Z.I. Via Italia, 6 - 26855 Lodivecchio (LO) Italy

COMPANY